



siegling
belting


Blue, safe and elastic
– three belts for the
packaging industry

Blue, safe and elastic – three belts for the packaging industry

With homogenous structures and easy-to-clean surfaces, the three new elastic types are ideal conveyor and processing belts for the special challenges the packaging sector presents.

Above all, these belts offer a huge benefit in terms of hygiene to food-industry users processing cheese, meat, fish and poultry. Excellent tracking characteristics and a lack of take-up system are further benefits.

UU 20U GSTR/FSTR black/blue FDA

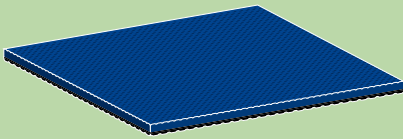


The elastic, antistatic belt for conveying unpackaged food.

For use in check-weighers, labelling and packaging machinery and separation systems. Can also be used as a carrier tape.

- In blue as a colour contrast: RAL 5002
- Easy belt tracking
- Easy to clean
- Antistatic
- FDA and EU compliant

Underside	Urethane
Top face	Urethane
Underside pattern	Coarse pattern
Top face pattern	Fine pattern
Article number	855588
d _{min} [mm]	10
Thickness [mm]	1.1
Elongation at fitting [%]	3 – 8
Weight [kg/m ²]	1.15
Permissible operating temperature [°C]	–20 to +50

UR 20U GSTR/FSTR black/blue

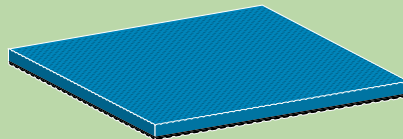


The elastic, antistatic belt with High Grip for conveying packaged food.

For use as an accelerator belt in check-weighers, convergers and labelling machines. Can also be used as a carrier tape.

- In blue as a colour contrast: RAL 5015
- Very high friction coefficient (adhesive top face)
- Very good grip
- Extreme positioning accuracy
- Impact resilient
- Easy to clean
- Antistatic

Underside	Urethane
Top face	High Grip
Underside pattern	Coarse pattern
Top face pattern	Fine pattern
Article number	855624
d _{min} [mm]	10
Thickness [mm]	1.5
Elongation at fitting [%]	3 – 8
Weight [kg/m ²]	1.6
Permissible operating temperature [°C]	–20 to +50

UU 60U-NA FSTR/FSTR blue FDA

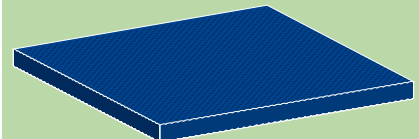

The elastic belt for conveying unpackaged food.

Perfect for use in packaging machinery, check-weighers, slicers and buffer conveyors for cheese or sausage. Can also be used as a live roller drive or as a carrier tape.

- In blue as a colour contrast: RAL 5002
- Impact resilient
- Resistant to hydrolysis
- Laterally stiff (compared with UU 20U)
- Easy belt tracking
- Easy to clean
- Not antistatic
- FDA and EU compliant

Underside	Urethane
Top face	Urethane
Underside pattern	Fine pattern
Top face pattern	Fine pattern
Article number	855595
d _{min} [mm]	20
Thickness [mm]	1.6
Elongation at fitting [%]	3 – 8
Weight [kg/m ²]	1.65
Permissible operating temperature [°C]	–20 to +50



MOVEMENT SYSTEMS

Forbo Siegling GmbH
Lilienthalstrasse 6/8, D-30179 Hannover
Phone +49 511 6704 0, Fax +49 511 6704 305
www.forbo-siegling.com, siegling@forbo.com

Forbo Movement Systems is part of the Forbo Group, a global leader in flooring, bonding and movement systems. www.forbo.com